OKR2014529
OKLAHOMA DEPARTMENT OF TRANSPORTATION
WETLAND
U.S. HIGHWAY 70 IMPROVEMENT
ENCLOSURE 3 OF 3




REQUIREMENTS FOR UNCLASSIFIED AND STRUCTURAL EXCAVATION OF R.C.B. STORM SEWERS

LEVEL UNEVEN SUBSURFACE AND WHEN NECESSARY, UNSTABLE MATERIAL UNDER THE BOTTOM SLAB SHALL BE REMOVED AND REPLACED IN ACCORDANCE WITH SECTION 501.05 OF THE CURRENT STANDARD SPECIFICATIONS.




REQUIREMENTS FOR EXCAVATION OF PRECAST R.C.B. STORM SEWERS

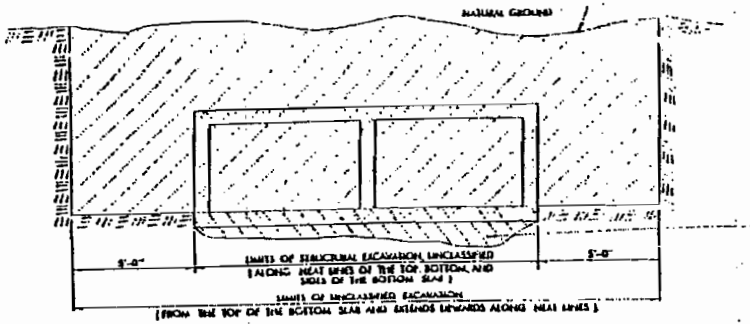


REQUIREMENTS FOR UNCLASSIFIED AND STRUCTURAL EXCAVATION OF R.C.B. CULVERTS OF ROADWAY AND BRIDGE CLASSIFICATION

LEVEL UNEVEN SUBSURFACE AND WHEN NECESSARY, UNSTABLE MATERIAL UNDER THE BOTTOM SLAB SHALL BE REMOVED AND REPLACED IN ACCORDANCE WITH SECTION 501.05 OF THE CURRENT STANDARD SPECIFICATIONS.

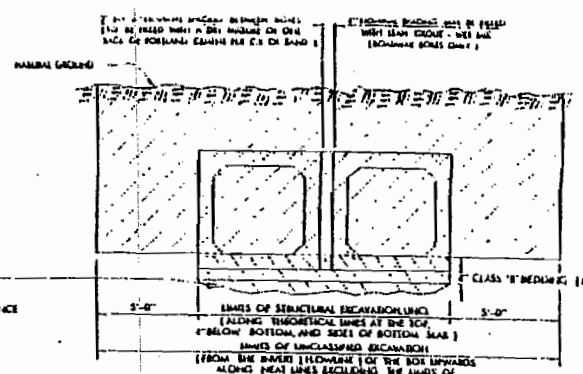


REQUIREMENTS FOR EXCAVATION OF PRECAST R.C.B. CULVERTS OF ROADWAY AND BRIDGE CLASSIFICATION.

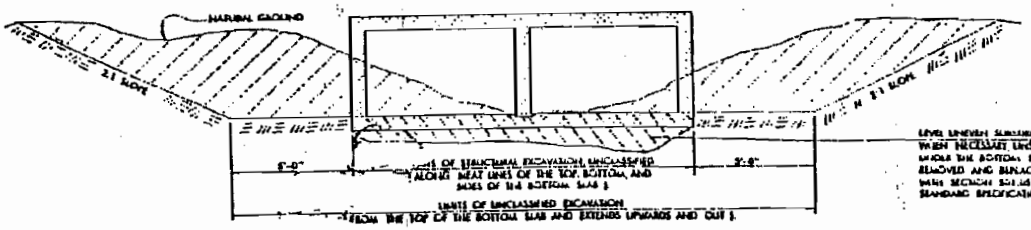


PLAN VIEW

LIMITS OF UNCLASSIFIED EXCAVATION

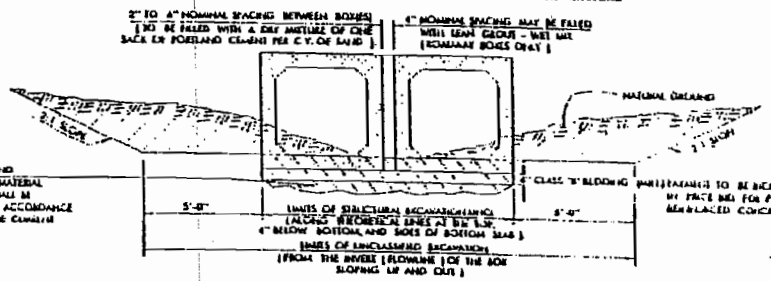LIMITS OF STRUCTURAL EXCAVATION (UNCLASSIFIED)

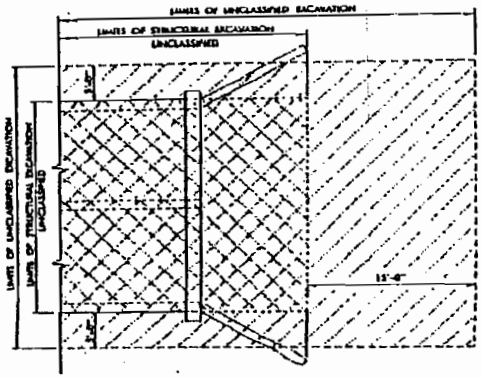


ALTERNATE METHOD FOR EXTENDING 0° SKEWED BOXES




ALTERNATE METHOD FOR EXTENDING NON-0° SKEWED BOXES

## GENERAL NOTES

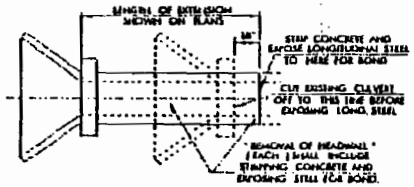1. PAYMENT FOR CAST-IN-PLACE REINFORCED CONCRETE BOXES WILL BE IN CUBIC YARDS OF CLASS A CONCRETE AND POUNDS OF REINFORCING STEEL IN ACCORDANCE WITH THE PROVISIONS OF SECTION 509 AND 511 OF THE 1999 ENGLISH STANDARD SPECIFICATIONS.
2. PAYMENT FOR PRECAST CONCRETE BOX CULVERTS WILL BE MADE BASED ON THE UNIT PRICES BID FOR ITEMS AND QUANTITIES OF A CAST-IN-PLACE BOX OF THE LENGTH REQUIRED AS DETERMINED BY FIELD MEASUREMENTS FOR THE CONSTRUCTION, IN ACCORDANCE WITH SECTION 508.05 OF THE 1999 ENGLISH STANDARD SPECIFICATIONS.

BASIS OF PAYMENT
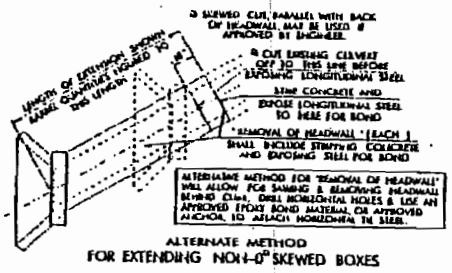
| ITEM NO | ITEM | UNIT |
|---|---|---|
| 202.04( C ) | UNCLASSIFIED EXCAVATION | CU YD |
| 501.64( A ) | STRUCTURAL EXCAVATION, UNCLASSIFIED | CU YD |
| | | |

APPROVED BY ROADWAY ENGINEER [signature] DATE 7-1-99

OKLAHOMA DEPT. OF TRANSPORTATION
ROADWAY STANDARD (ENGLISH)
REINFORCED CONCRETE BOX INSTALLATION

1999 SPECIFICATIONS | 501-3 | 60E | R-75E

REINFORCED CONCRETE BOX INSTALLATION