# ORU BRIDGE
## ORAL ROBERTS UNIVERSITY
### SECTION 8, T-18-N, R-13-E
### CITY OF TULSA, TULSA COUNTY, OKLAHOMA




**Owner**

ORAL ROBERTS UNIVERSITY
7777 SOUTH LEWIS
PO BOX 2187
TULSA OK 74171
PHONE: (918)495-6161
ATTN: DAVID ELLSWORTH

**PFPI Review**

1. STORMWATER
2. TRANSPORTATION ENGINEERING

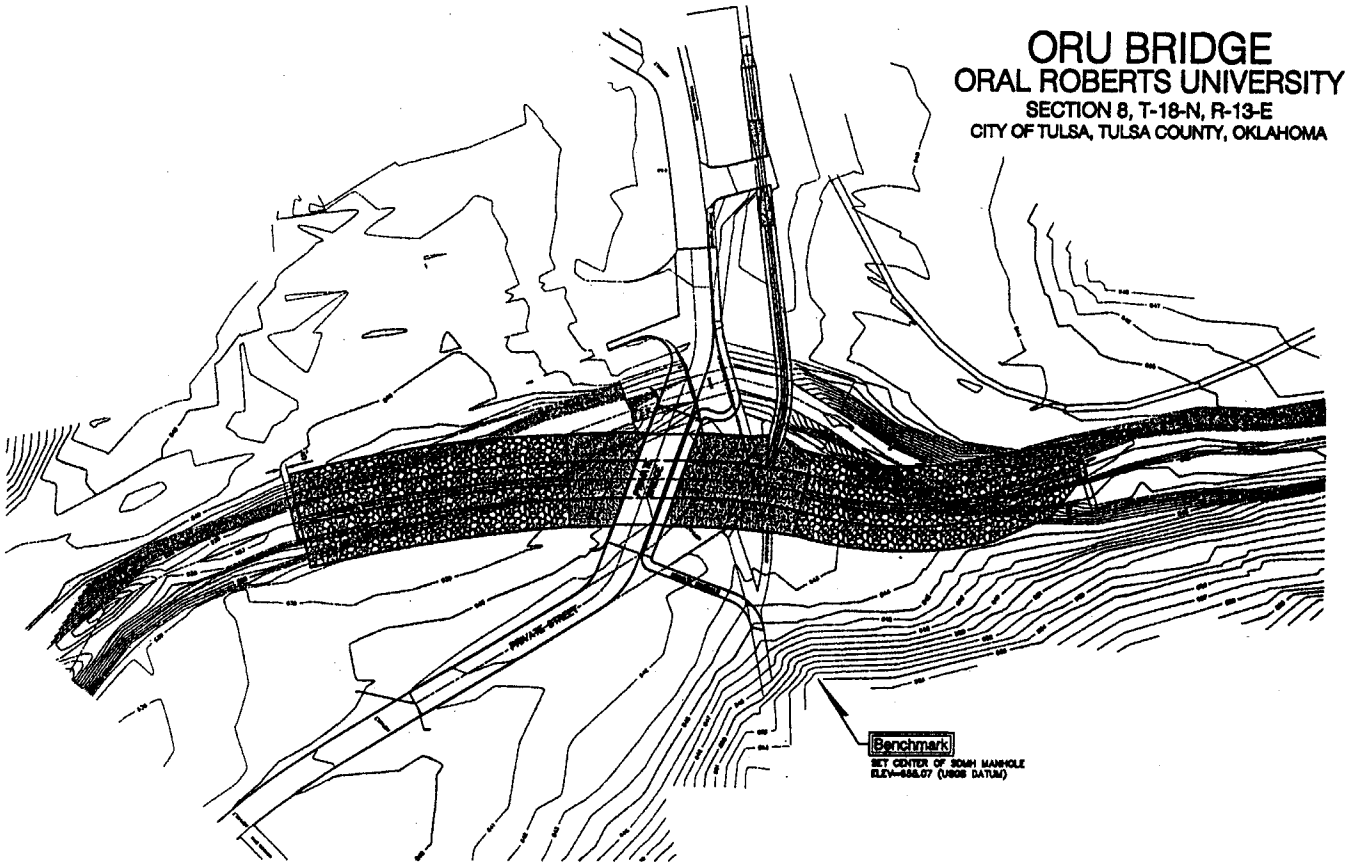


**Location Map**

**PFPI Description**

GRADING AND STORM SEWER TO SERVE PART OF BLOCK ONE (1), ORAL ROBERTS UNIVERSITY HEIGHTS, A SUBDIVISION OF THE SOUTHWEST QUARTER (SW/4) OF SECTION EIGHT (8), TOWNSHIP EIGHTEEN (18) NORTH, RANGE THIRTEEN (13) EAST, CITY OF TULSA, TULSA COUNTY, STATE OF OKLAHOMA, ACCORDING TO THE RECORDED PLAT NO. 2390

**General Notes**

1. ALL CONSTRUCTION SHALL BE IN STRICT ACCORDANCE WITH CITY OF TULSA, OKLAHOMA, STANDARDS AND SPECIFICATIONS.
2. EXISTING UNDERGROUND LINES HAVE BEEN SHOWN TO THE EXTENT KNOWN AND LOCATIONS HAVE BEEN VERIFIED BY THE OWNERS OF SAID LINES. THE EXACT LOCATIONS AND NOTIFICATIONS OF THE PROPER AGENCY IS THE RESPONSIBILITY OF THE CONTRACTOR PRIOR TO ANY EXCAVATION.

   ACP PUBLIC SERVICE COMPANY OF OKLAHOMA
   OKLAHOMA NATURAL GAS COMPANY
   COX COMMUNICATIONS
   SOUTHWESTERN BELL TELEPHONE COMPANY
3. AFTER CONSTRUCTION IS COMPLETE, ALL DISTURBED AREAS SHALL BE RESEEDED ACCORDING TO CITY OF TULSA, OKLAHOMA, SPECIFICATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR SEEDED AREAS UNTIL GROWTH IS ESTABLISHED.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING THE NECESSARY WORK ORDERS AND PERMITS FROM THE CITY OF TULSA, INCLUDING PROVISIONS OF BONDS AND INSURANCE AS REQUIRED. THE FOLLOWING ITEMS SHALL BE FURNISHED IN TRIPLICATE TO THE PUBLIC WORKS DEPARTMENT:

   PERFORMANCE BOND UNTO CITY OF TULSA
   MAINTENANCE BOND UNTO CITY OF TULSA
   STATUTORY BOND UNTO STATE OF OKLAHOMA
   CERTIFICATE OF INSURANCE
   OWNER'S PROTECTIVE INSURANCE POLICY WITH CITY OF TULSA AS THE INSURED
   POWER OF ATTORNEY WITH ORIGINAL SEAL
   BID PROPOSAL, FULLY EXECUTED BY CONTRACTOR AND OWNER
   APPLICATION FOR PRIVATELY FINANCED PUBLIC IMPROVEMENTS PERMIT
5. ALL FORMS ARE AVAILABLE FROM CITY OF TULSA DEVELOPMENT SERVICES, 111 SOUTH GREENWOOD AVENUE, SUITE 101, TULSA, OKLAHOMA, 74120. CONTRACTOR SHALL PROVIDE A CHECK TO THE CITY OF TULSA FOR $30.00 PER DAY TIMES CALENDAR DAYS SHOWN ON THE APPLICATION AND PROPOSAL.
6. THE CITY OF TULSA REQUIRES THAT CONSTRUCTION SURVEYS AND PERIODIC OBSERVATION BE PERFORMED BY SACK AND ASSOCIATES, INC., AS THE ENGINEER OF RECORD FOR THESE PLANS.
7. SPOIL FROM EXCESS EXCAVATION SHALL BE SPREAD IN AREAS OUTSIDE OF THE STREET RIGHTS-OF-WAY AS DIRECTED BY THE OWNER OR ENGINEER.
8. PROJECT RESULTS IN MODIFICATION OF 676 L.F. OF FLOODWAY.

**Sheet Index**


| | |
|---|---|
| 1 | COVER SHEET |
| 2 | GRADING PLAN |
| 3 | PAVING PLAN |
| 4 | CHANNEL CROSS SECTIONS |
| 5 | CHANNEL CROSS SECTION |
| 6 | CHANNEL PROFILE |
| 7 | GENERAL BRIDGE NOTES |
| 8 | GENERAL PLAN AND ELEVATION |
| 9 | SUBSTRUCTURE LAYOUT |
| 10 | ABUTMENT NO. 1 |
| 11 | ABUTMENT NO. 2 |
| 12 | WINGWALL AND ABUTMENT DETAILS |
| 13 | BEAM FRAMING PLAN |
| 14 | PRESTRESSED CONC. BEAM DETAILS |
| 15 | TYPICAL CROSS SECTION AND BEARING DETAILS |
| 16 | DIAPHRAGM AND MISC. DETAILS |
| 17 | SLAB ENFORCING PLAN |
| 18 | APPROACH SLAB PLAN AND DETAILS |
| 19 | STANDARD PARAPET WALL DETAILS |
| 20 | PEDESTRIAN RAIL PLAN AND DETAILS |


**Owner's Statement**

I HEREBY CERTIFY THAT THE APPROVED DRAINAGE AND/OR GRADING PLANS WILL BE IMPLEMENTED UNDER THE DIRECT ENGINEERING SUPERVISION OF A REGISTERED PROFESSIONAL ENGINEER.

**Engineer's Statement**

I HEREBY CERTIFY THAT THIS PLAN FOR DRAINAGE DESIGN OF THE DEVELOPMENT WAS PREPARED UNDER MY DIRECT SUPERVISION IN ACCORDANCE WITH THE PROVISIONS OF CITY OF TULSA STORM WATER MANAGEMENT MANUAL FOR THE OWNERS THEREOF.

REGISTERED PROFESSIONAL ENGINEER
STATE OF OKLAHOMA NO. 19654

REGISTERED PROFESSIONAL ENGINEER OKLAHOMA

DATE SIGNED 2-13-2002

0 50 100
SCALE IN FEET

ORAL ROBERTS UNIVERSITY
BRIDGE REPLACEMENT
(4TH BRIDGE)

| |
|---|
| COVER SHEET |
| PFPI NUMBER 649 |
| CITY OF TULSA, OKLAHOMA |

SACK AND ASSOCIATES, INC.

BEFORE YOU DIG
CALL OKIE
(800) 522-6543

OKR2012160
ORAL ROBERTS UNIVERSITY
FRED CREEK
BRIDGE REPLACEMENT AND REALIGNMENT
ENCLOSURE 2 OF 5