OKR2012899
RECREATIONAL LAKE
UNNAMED TRIBUTARY
ENCLOSURE 5 of 5

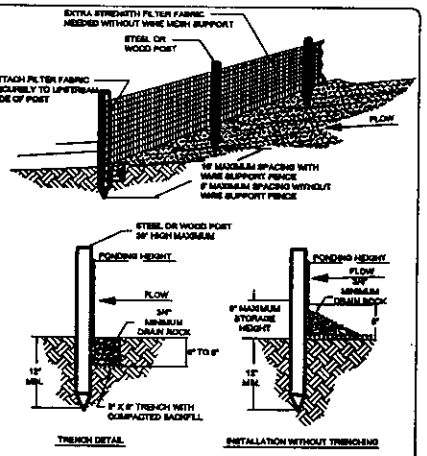

NOTES:

1. MUST BE INSTALLED PROPERLY TO AVOID NOTICE OF VIOLATION.
2. SILT FENCE SHALL BE PLACED ON SLOPE CONTOURS TO MAXIMIZE POUNDING EFFICIENCY.
3. INSPECT AND REPAIR FENCE AFTER EACH STORM EVENT AND REMOVE SEDIMENT WHEN NECESSARY. 6" MAXIMUM RECOMMENDED STORAGE HEIGHT.
4. REMOVED SEDIMENT SHALL BE DEPOSITED TO AN AREA THAT WILL NOT CONTRIBUTE TO SEDIMENT OFF-SITE AND CAN BE PERMANENTLY STABILIZED.

SILT FENCE DETAIL

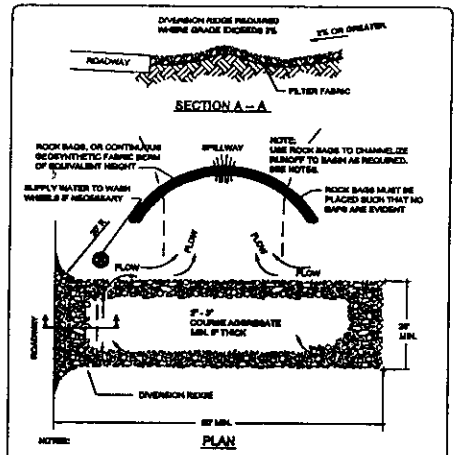

NOTES:

1. THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION THAT WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHT-OF-WAYS. THIS MAY REQUIRE TOP DRESSING, REPAIR AND/OR CLEANOUT OF ANY MEASURES USED TO TRAP SEDIMENT.
2. WHEN NECESSARY, WHEELS SHALL BE CLEANED PRIOR TO ENTRANCE ONTO PUBLIC RIGHT-OF-WAY.
3. WHEN WASHING IS REQUIRED, IT SHALL BE DONE ON AN AREA STABILIZED WITH CRUSHED STONE THAT DRAINS INTO AN APPROVED SEDIMENT TRAP OR SEDIMENT BASIN.
4. ROCK BAGS OR BARRIAGE SHALL BE PLACED SUCH THAT NO GAPS ARE EVIDENT. USE ROCK BAG SILT FENCE NOTES ABOVE.

TEMPORARY GRAVEL CONSTRUCTION ENTRANCE/EXIT

		DATE	SEDIMENT/EROSION CONTROL DETAILS
		SCALE N.T.S.	LAKEside OF GRANDALE
		JOB NUMBER WAL 300240	REPORT ROAD & AIR DEPOT BLVD.
		DWN BY	OKLAHOMA CITY, OKLAHOMA
		CHKD BY	COON ENGINEERING, INC.
		APPROVED BY	CA 1179 EXP. 6-30-03 CONSULTING ENGINEERS LAND SURVEYORS
REVISIONS	DATE		SHEET 5 of 5