

All Construction Project Identification signs and Safety Performance signs are to be fabricated and installed as described below. The signs are to be erected at a location designated by the contracting officer and shall conform to size, format, and typographic standards.

The sign panels are to be fabricated from .75" High Density Overlay Plywood.

Sign graphics to be prepared on a white non-reflective vinyl film with positionable adhesive backing.

All graphics except for the Communications Red background with Corps signature on the project sign are to die-cut or computer cut nonreflective vinyl, pre-spaced legends prepared in the sizes and typefaces specified and applied to the background panel following the graphic formats shown.

The 2' x 4' Communications Red panel (to match PMS-032) with full Corps signature (reverse version) is to be screen printed on the white background identification of the District / Division may be applied under the signature with white cut vinyl letters prepared to Corps standards


Drill and insert six (6) .375 T-nuts from the front face of the HDO sign panel. Position holes as shown. Flange of T-nut to be flush with sign face

Apply Graphic panel to prepared HDO plywood panel following manufactures instructions

Sign uprights to be structural grade 4" x 4" treated Douglas Fur or Southern Yellow Pine. No 1 or better. Post to be 12' long Drill six (6) .375" mounting holes in uprights to align with T-nuts in sign panel. Countersink (5") back of hole to accept socket head cap screw ( 4" x .375" ).

Assemble sign panel and uprights. Imbed assembled sign panel and uprights in 4' hole. Local soil conditions and/or wind loading may require bolting additional 2" x 4" structs on inside face of uprights to reinforce installation shown.

Shown below the mounting diagram is a panel layout grid with spaces provided for project information. Photocopy this page and use as a worksheet when preparing sign Legend orders.

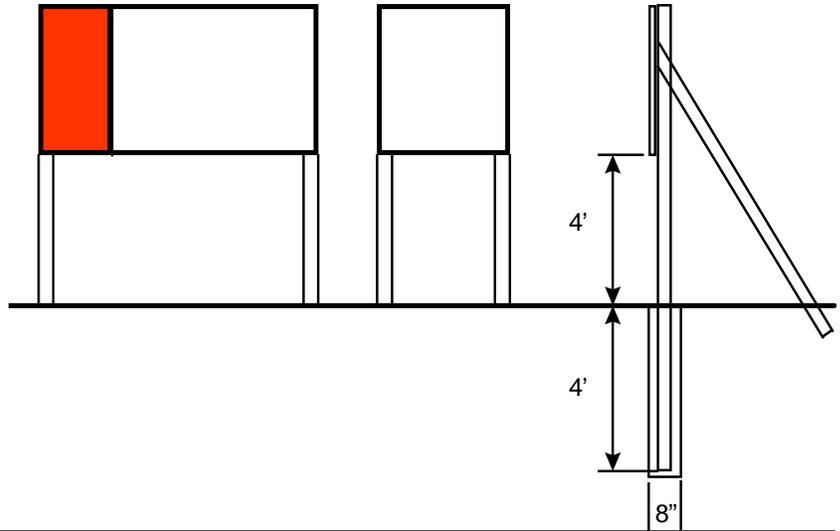

Construction Project Sign  
Legend Group 1

- 1 \_\_\_\_\_
- 2 \_\_\_\_\_

Legend Group 2 Division/District Names

- 1 \_\_\_\_\_
- 2 \_\_\_\_\_

Legend Group 3 Project Title

- 1 \_\_\_\_\_
- 2 \_\_\_\_\_
- 3 \_\_\_\_\_

Legend Group 4 Facility Name

- 1 \_\_\_\_\_
- 2 \_\_\_\_\_

Legend Group 5a: Contractor/A&E

- 1 \_\_\_\_\_
- 2 \_\_\_\_\_
- 3 \_\_\_\_\_
- 4 \_\_\_\_\_
- 5 \_\_\_\_\_

Legend Group 5b: Contractor/A&E

- 1 \_\_\_\_\_
- 2 \_\_\_\_\_
- 3 \_\_\_\_\_
- 4 \_\_\_\_\_
- 5 \_\_\_\_\_

Safety Performance Sign  
Legend Group 1: Project Title

- 1 \_\_\_\_\_
- 2 \_\_\_\_\_

Legend Group 2: Contractor/A&E

- 1 \_\_\_\_\_
- 2 \_\_\_\_\_