PARTIAL BOUNDARY SURVEYS
WEBBERS FALLS LOCK & DAM NO. 16
ARKANSAS RIVER, OKLAHOMA

Performed Under Contract Number DACW 56-75-C-0064

SEC. 25 T 16 N R 19 E COUNTY CHEROKEE & WAGONER

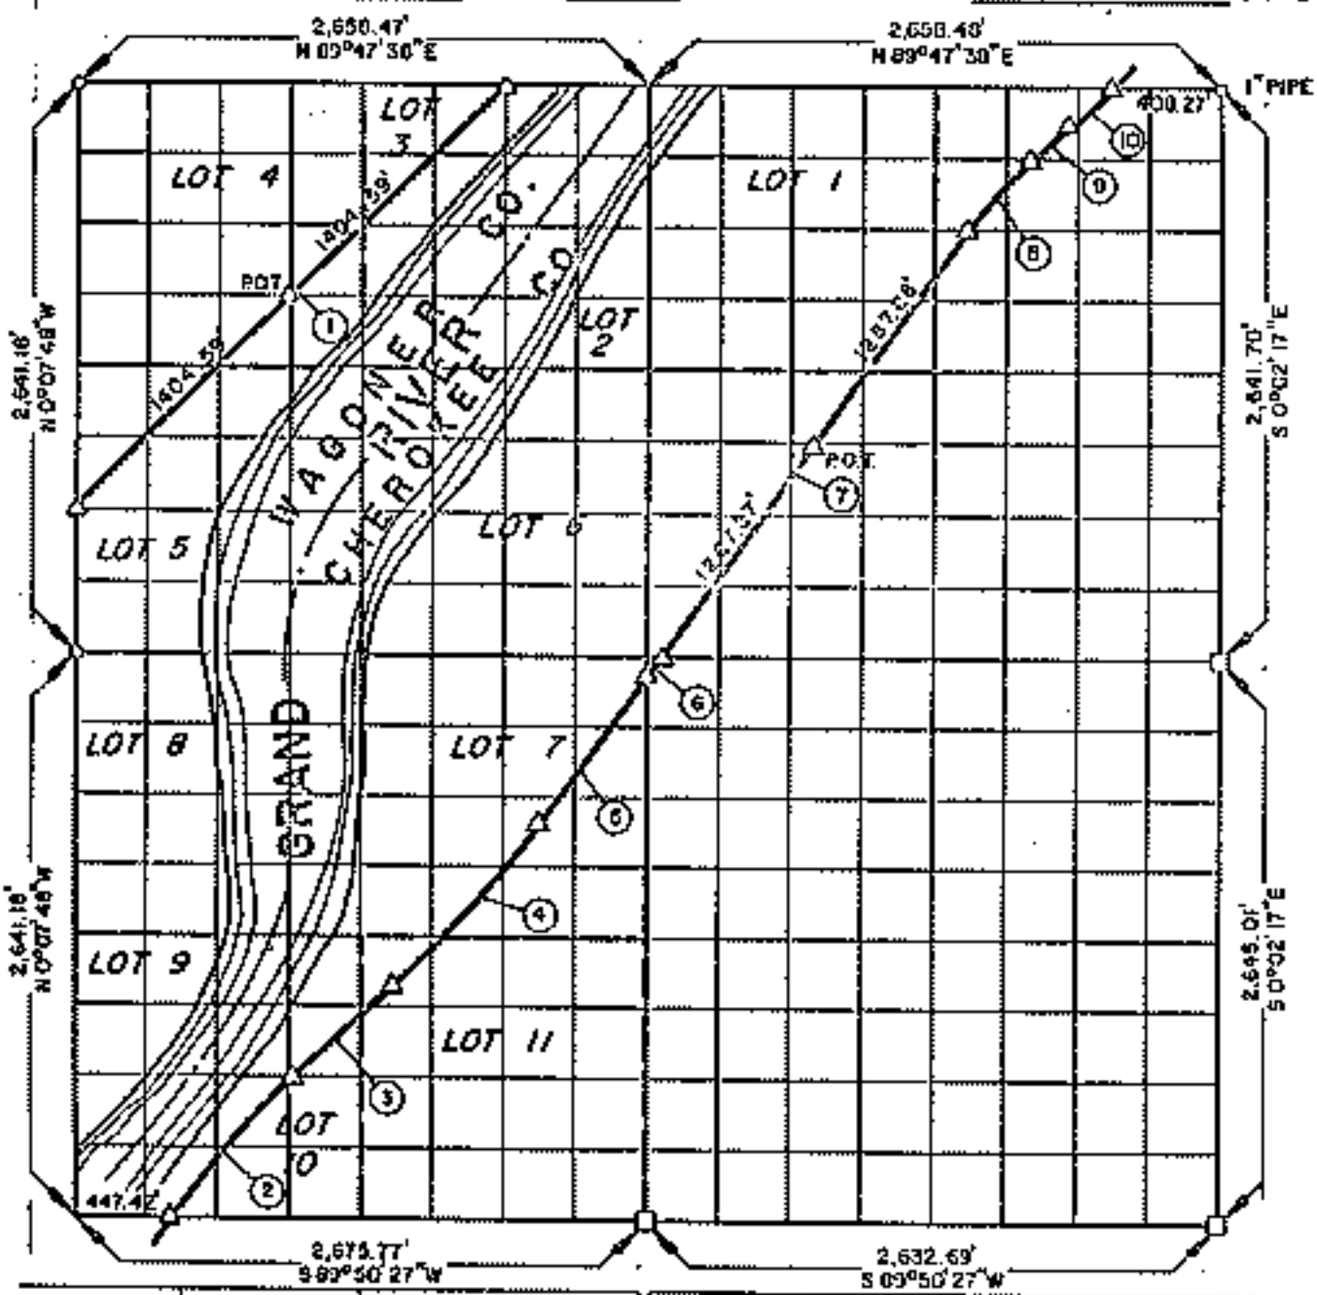

Course No.	Distance	Bearing
1	2,809.17'	N 44°57'08"E
2	1,133.22'	Curve No. 1
3	496.07'	N 43°51'22"E
4	1,130.44'	Curve No. 2
5	667.30'	N 38°12'14"E
6	46.19'	N 38°12'14"E
7	2,575.75'	N 38°12'14"E
8	321.63'	Curve No. 3
9	242.07'	N 47°51'10"E
10	312.98'	Curve No. 4

Course No.	Distance	Bearing

CURVE NO.

	1	2	3	4
Δ	9°16'32"	5°39'08"	9°30'56"	9°23'21"
D	0°49'06"	0°30'	3°00'	3°00'
R	7,000.00'	11,459.16'	1,909.86'	1,909.86'
T	567.05'	565.68'	161.20'	312.97'
L	1,133.22'	1,130.44'	321.63'	156.54'
Lc	1,131.99'	1,129.99'	321.25'	312.62'

Field Book No. A-3292, Date 6-6-75

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION 25, T 16 N, R 19 E, CHEROKEE & WAGONER COUNTIES, OKLAHOMA.

K. N. COX & ASSOCIATES - ENGINEERS

Under the Supervision of

U.S. ARMY ENGINEER DISTRICT, TULSA
CORPS OF ENGINEERS

LEGEND

- △ MONUMENT
- ⊡ ORIGINAL CORNER
- ○ IRON PIN