PARTIAL BOUNDARY SURVEYS
WEBBERS FALLS LOCK & DAM NO. 16
ARKANSAS RIVER, OKLAHOMA

Performed Under Contract Number DACW 56-75-C-0064

SEC. 18 T 16N R 20E COUNTY WAGONER & CHEROKEE

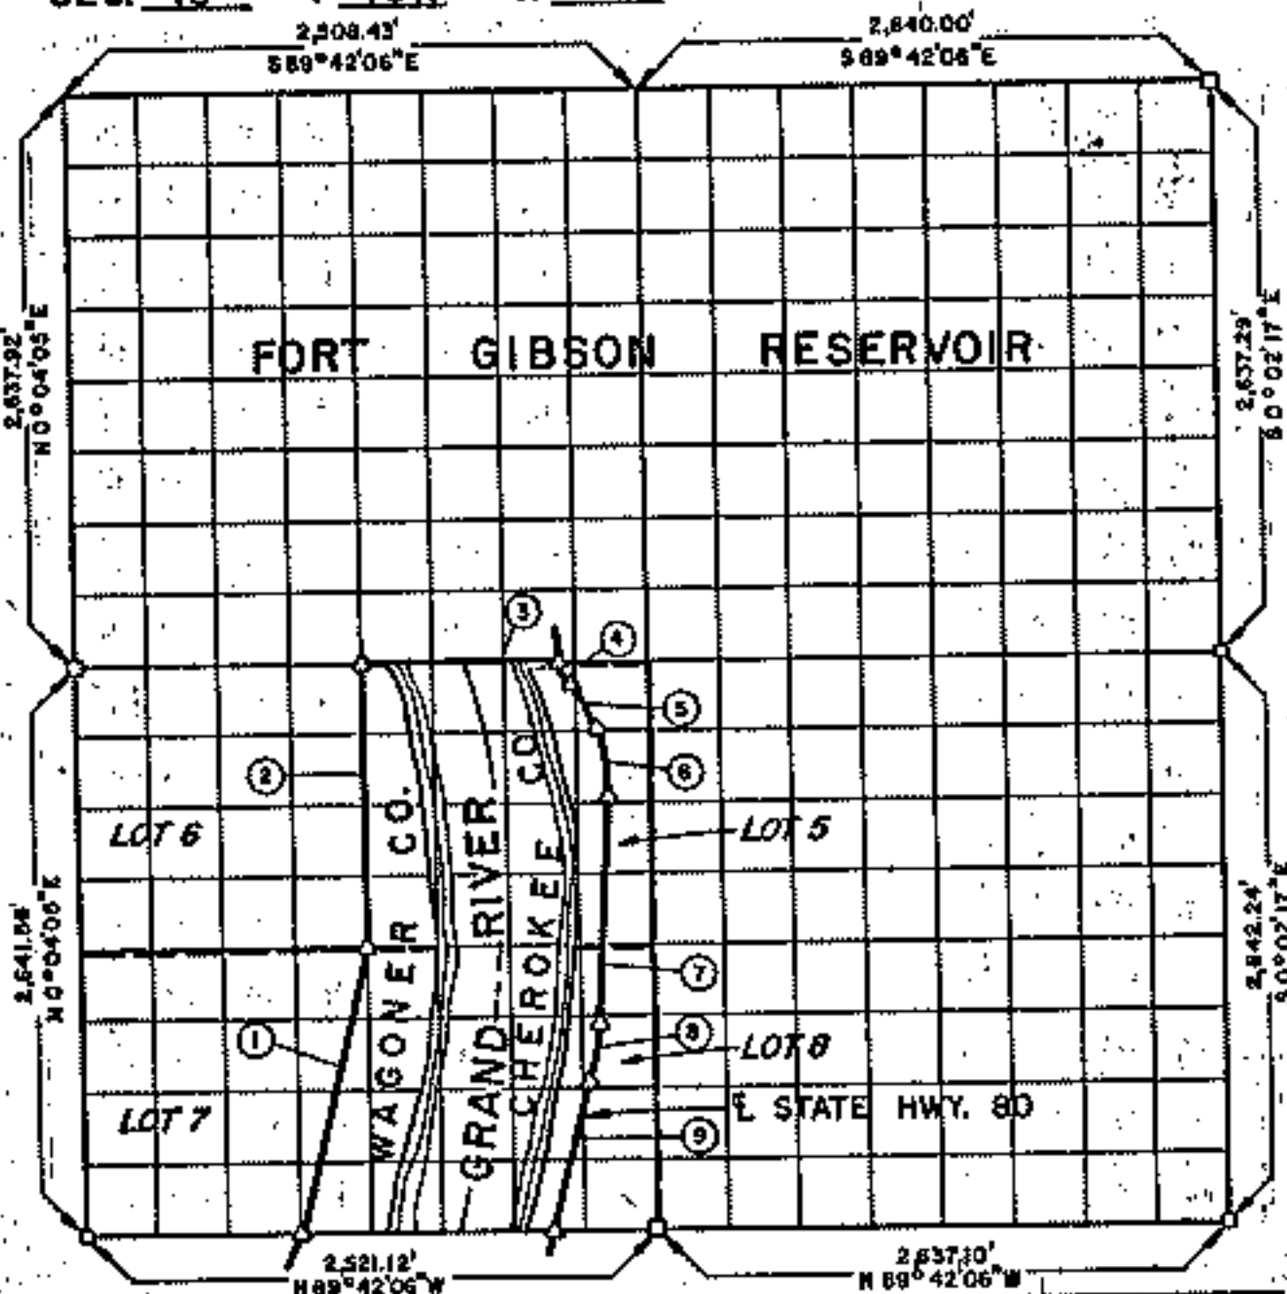

Course No.	Distance	Bearing
1	1,360.18'	N14°06'32"E
2	1,320.86'	N 0°04'05"E
3	963.89'	S89°42'32"E
4	57.02'	Curve No. 1
5	283.92'	S 4°01'12"E
6	252.84'	Curve No. 2
7	1,054.74'	S 6°05'37"W
8	299.42'	Curve No. 3
9	742.83'	S18°04'13"W

Course No.	Distance	Bearing
Curve No. 1	Curve No. 2	Curve No. 3
Δ=1°42'38"	Δ=10°06'49"	Δ=11°58'36"
D=3°00'	D=4°00'	D=4°00'
R=1,909.86'	R=1,432.39'	R=1,432.39'
T=28.51'	T=126.75'	T=150.26'
L=57.02'	L=252.84'	L=299.42'
Lc=57.02'	Lc=252.61'	Lc=298.87'

Field Book No. A-3290 Date 6-6-75

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION 18, T 16N, R 20E, WAGONER & CHEROKEE COUNTIES, OKLAHOMA.

K. N. COX & ASSOCIATES - ENGINEERS

Under the Supervision of

U.S. ARMY ENGINEER DISTRICT, TULSA
CORPS OF ENGINEERS

LEGEND
- ▲ MONUMENT
- □ ORIGINAL CORNER
- ○ IRON PIN