PARTIAL BOUNDARY SURVEYS
FT. GIBSON LAKE
OKLAHOMA

Performed Under Contract Number DACW 56-85-C-0127

NE 4 SEC. 29 , T. 18 N , R. 19 E , COUNTY WAGONER

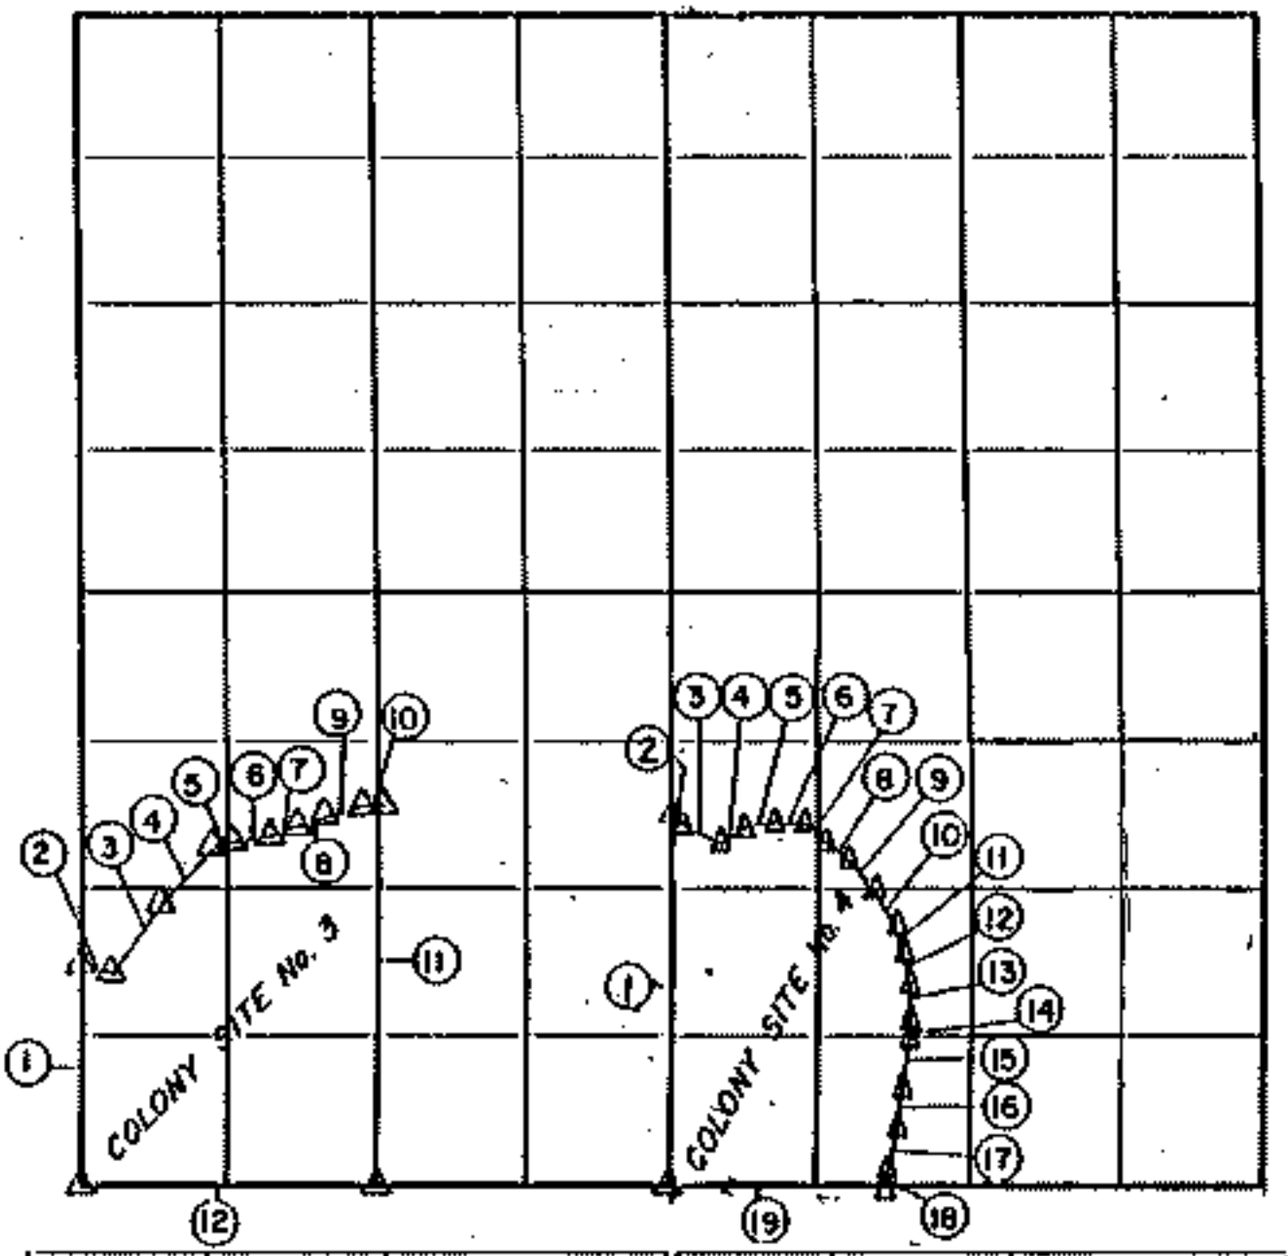

Course No.	Distance	Bearing
COLONY SITE No. 3		
1	499.85	NORTH
2	88.25	S 67° 41' E
3	188.45	N 34° 30' E
4	175.80	N 42° 32' E
5	35.00	N 70° 10' E
6	80.90	N 78° 55' E
7	64.20	N 66° 52' E
8	65.80	N 68° 01' E
9	80.39	N 67° 53' E
10	51.88	N 66° 44' E
11	866.44	SOUTH
12	665.75	N 89° 42' 37" W

Course No.	Distance	Bearing
COLONY SITE No. 4		
1	828.40	N 00° 02' 43" E
2	35.78	S 51° 18' E
3	96.04	S 62° 30' E
4	71.66	N 51° 34' E
5	64.15	N 82° 59' E
6	67.90	S 81° 42' E
7	59.75	S 53° 18' E
8	66.60	S 57° 20' E
9	91.25	S 42° 52' E
10	90.88	S 36° 55' E
11	63.20	S 18° 15' E
12	89.80	S 03° 34' W

CERTIFICATE OF SURVEY

I hereby certify that the above and foregoing is a correct representation of the field work made of the land herein described.

REGISTERED LAND SURVEYOR
BASIL E. SCOTT, JR.

Field Book No. 5-2007 Date 9-6-85

SCOTT & ASSOCIATES, INC.
Engineering & Surveying
For
U.S. ARMY ENGINEER DISTRICT, TULSA
CORPS OF ENGINEERS

△ MONUMENT
● ORIGINAL CORNER
○ IRON PIN

MYI AR 7