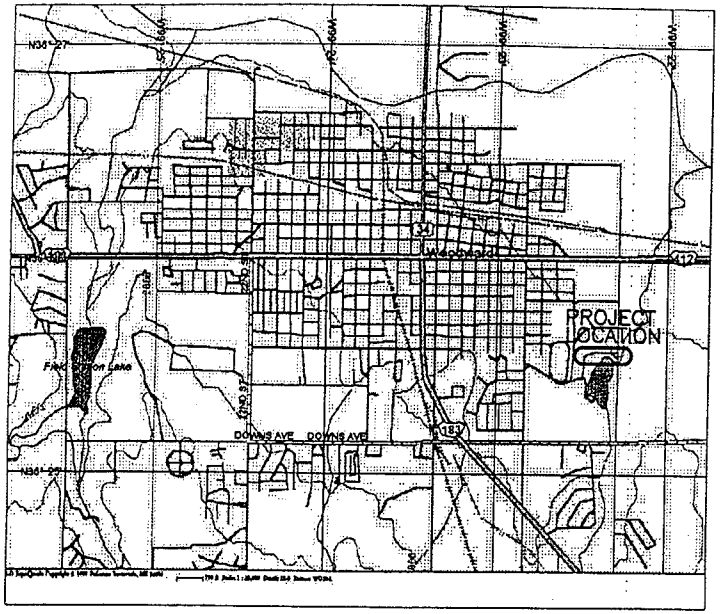

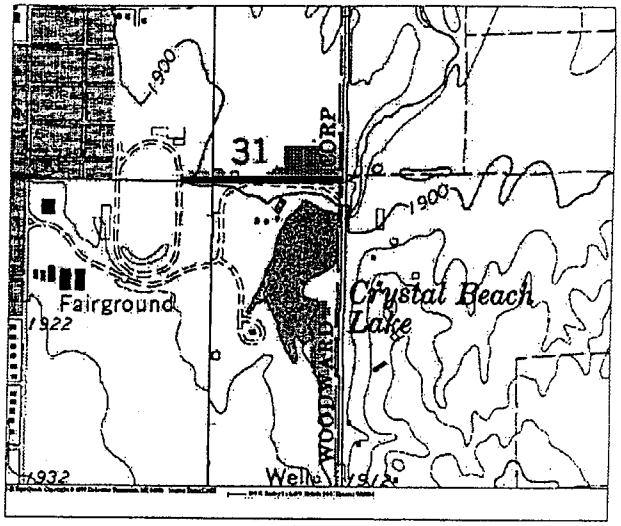

PAY QUANTITY SCHEDULE

DESCRIPTION	UNIT	TOTAL
83" X 57" CSP PIPE ARCHES w/2 2/3" X 1/2" CORRUGATION	L.F.	1,280
MASONRY HEADWALLS	L.S.	1
56" X 56" DRAINAGE GRATES	EA.	8
30" X 30" DRAINAGE INLETS	EA.	6
CONCRETE BRIDGE STRUCTURE REMOVAL	L.S.	1
REINFORCED CONCRETE PAVING	CU..YD.	13.9
BACKFILL AND COMPACTION	CU.YD.	4,360
SODDING	SQ.FT.	26,250
MOBILIZATION	LS.	1

ENVIRONMENTAL ENGINEERING CONSULTANTS, INC.
311 South Duck Stillwater, Ok 74074 (405) 377-4666
Expires 6/30/2003
Copyright © 2001 Environmental Engineering Consultants, Inc. All Rights Reserved

REGISTERED PROFESSIONAL ENGINEER
DAVID LEE ENCANNON
16314
OKLAHOMA

DRAINAGE CHANNEL IMPROVEMENTS
CHRYSTAL BEACH PARK
City of Woodward
Woodward, Oklahoma

REV	BY	DESCRIPTION

DATE	9-11-2000
DRAWN	BRM
SCALE	01-1070-19
APPROVED	PG/DWG

OKLAHOMA

PROJECT LOCATION AND PAY QUANTITIES

SHEET 1

OKR2011517 11517-1

Vicnity Map
Crystal Beach Park
Woodward, Oklahoma