PARTIAL BOUNDARY SURVEYS

ROBERT S. KERR LOCK AND DAM 15
ARKANSAS RIVER, OKLAHOMA

Performed Under Contract Number DA-34-066-Civeng 66-214

SEC 14 T -9-N R -22-E COUNTY HASKELL

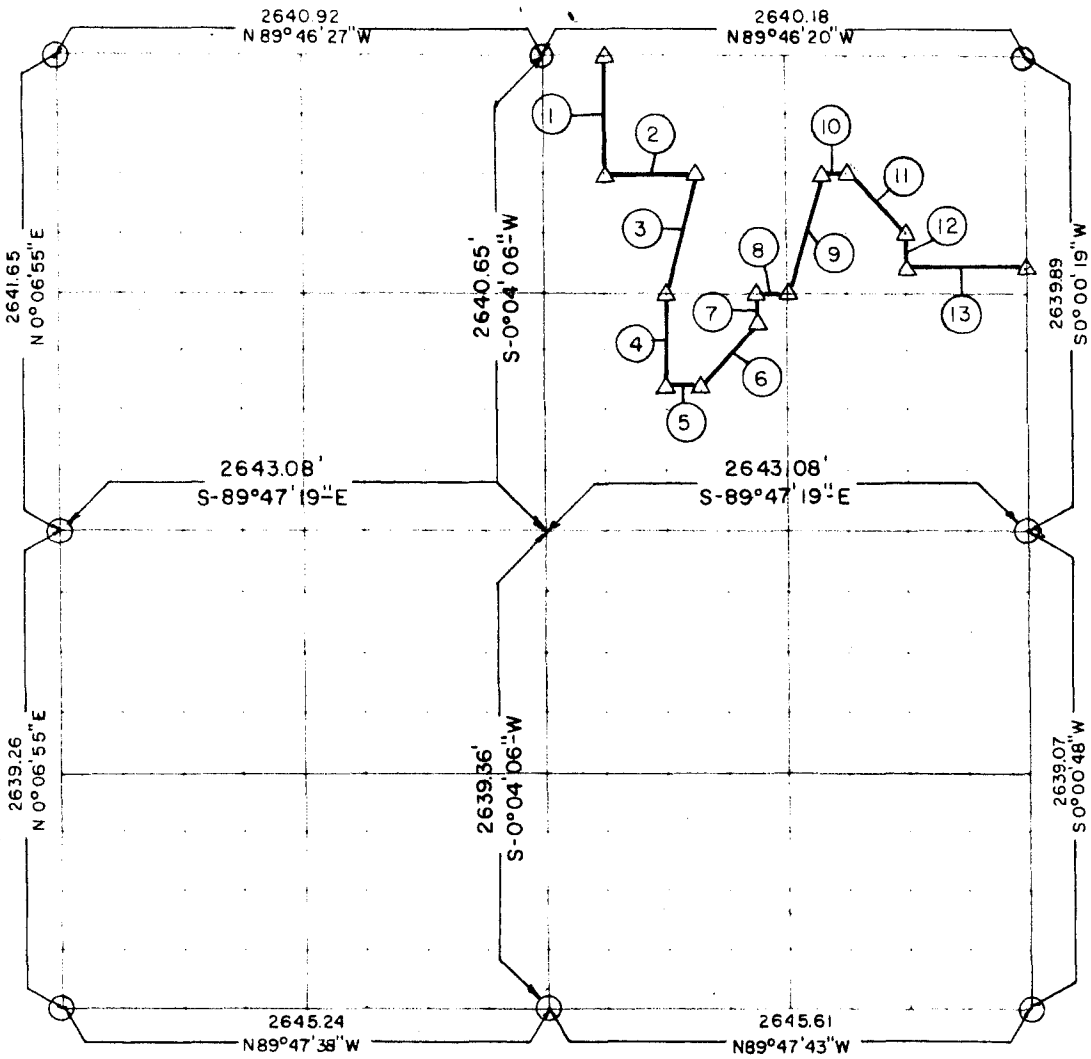

Course No	Distance	Bearing	Course No	Distance	Bearing
1	660.21	S0° 03' 37" W			
2	495.17	S89° 46' 41" E			
3	680.02	S14° 05' 59" W			
4	495.13	S 0° 03' 09" W			
5	165.14	S89° 47' 17" E			
6	466.23	N45° 08' 38" E			
7	165.03	N 0° 02' 26" E			
8	165.10	S89° 47' 07" E			
9	679.91	N 14° 05' 11" E			
10	165.06	S89° 46' 39" E			
11	467.60	S44° 53' 11" E			
12	119.98	S 0° 01' 17" W			
13	660.34	S89° 46' 43" E			

Field Book No. A-2409 Date 3-31-66

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION 14, T 9 N R 22 E, HASKELL COUNTY, OKLAHOMA

REGISTERED PROFESSIONAL ENGINEER

BREISCH ENGINEERING COMPANY

Under the Supervision of

U.S. ARMY ENGINEER DISTRICT, TULSA
CORPS OF ENGINEERS

LEGEND

△ MONUMENT

□ ORIGINAL CORNER

○ IRON PIN

PARTIAL BOUNDARY SURVEYS
ROBERT S. KERR LOCK AND DAM 15
ARKANSAS RIVER, OKLAHOMA

Performed Under Contract Number DACW 56-68-C-0100

SUPPLEMENTAL SHEET

SEC 14 T -9-N R -22-E COUNTY HASKELL

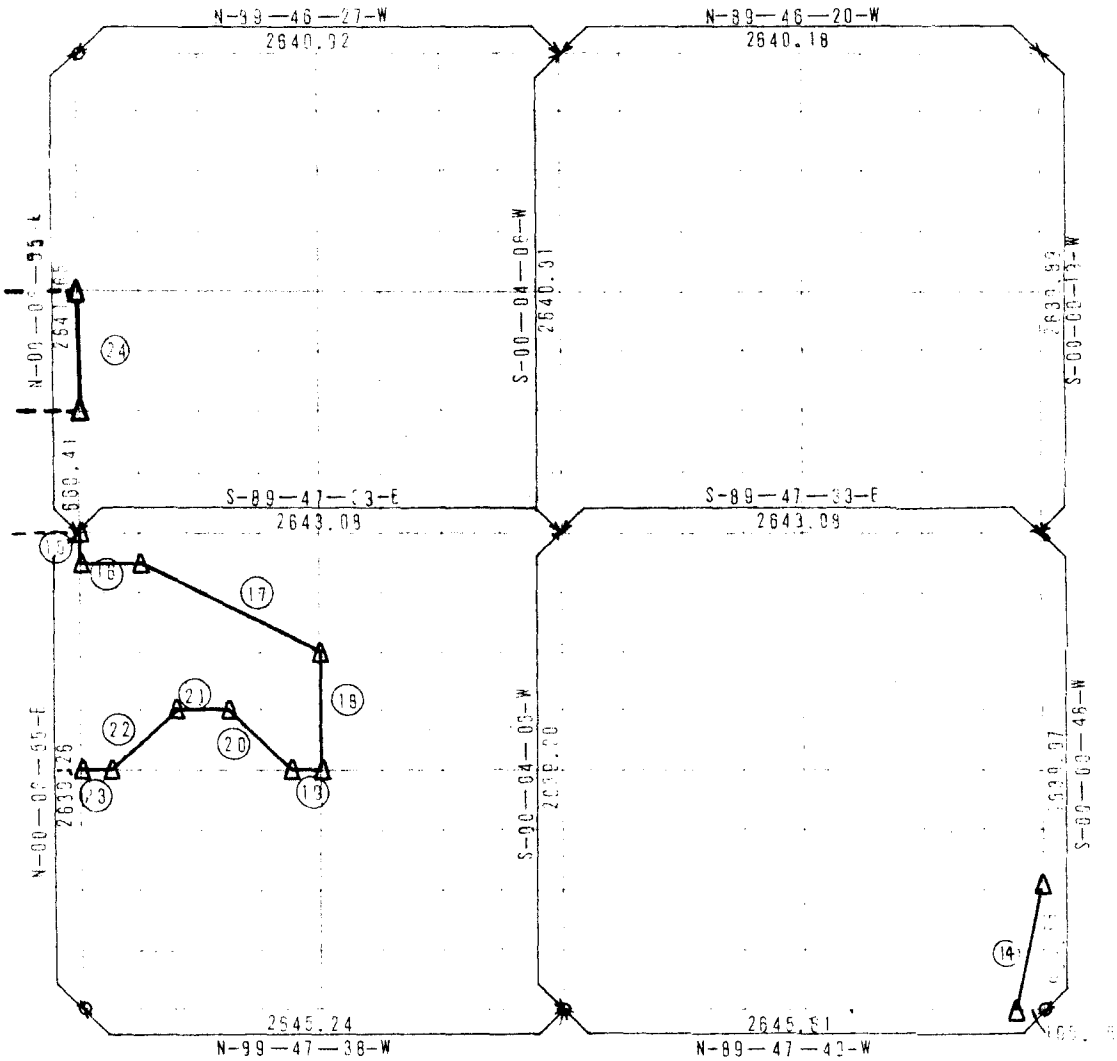

Course No	Distance	Bearing	Course No	Distance	Bearing
14	679.04	N-14-05-39-E			
15	194.95	S-00-06-55-W			
16	330.40	S-89-47-33-E			
17	1108.77	S-00-17-07-E			
18	659.81	S-00-05-30-W			
19	105.29	N-89-47-35-W			
20	467.43	N-44-53-59-W			
21	330.49	N-89-47-34-W			
22	400.58	S-45-12-37-W			
23	185.20	N-89-47-35-W			
24	660.41	N-00-06-55-E			

5,190.[illegible]

Field Book No A 753 Date June 20, 1968

ARKANSAS BASIN SURVEYORS, INC.

U.S. ARMY ENGINEER DISTRICT, TULSA
CORPS OF ENGINEERS