PARTIAL BOUNDARY SURVEYS
FT. GIBSON LAKE
OKLAHOMA

Performed Under Contract Number DACW 56-85-C-0127

NE/4 SEC. 4, T. 17 N, R. 19 E, COUNTY WAGONER

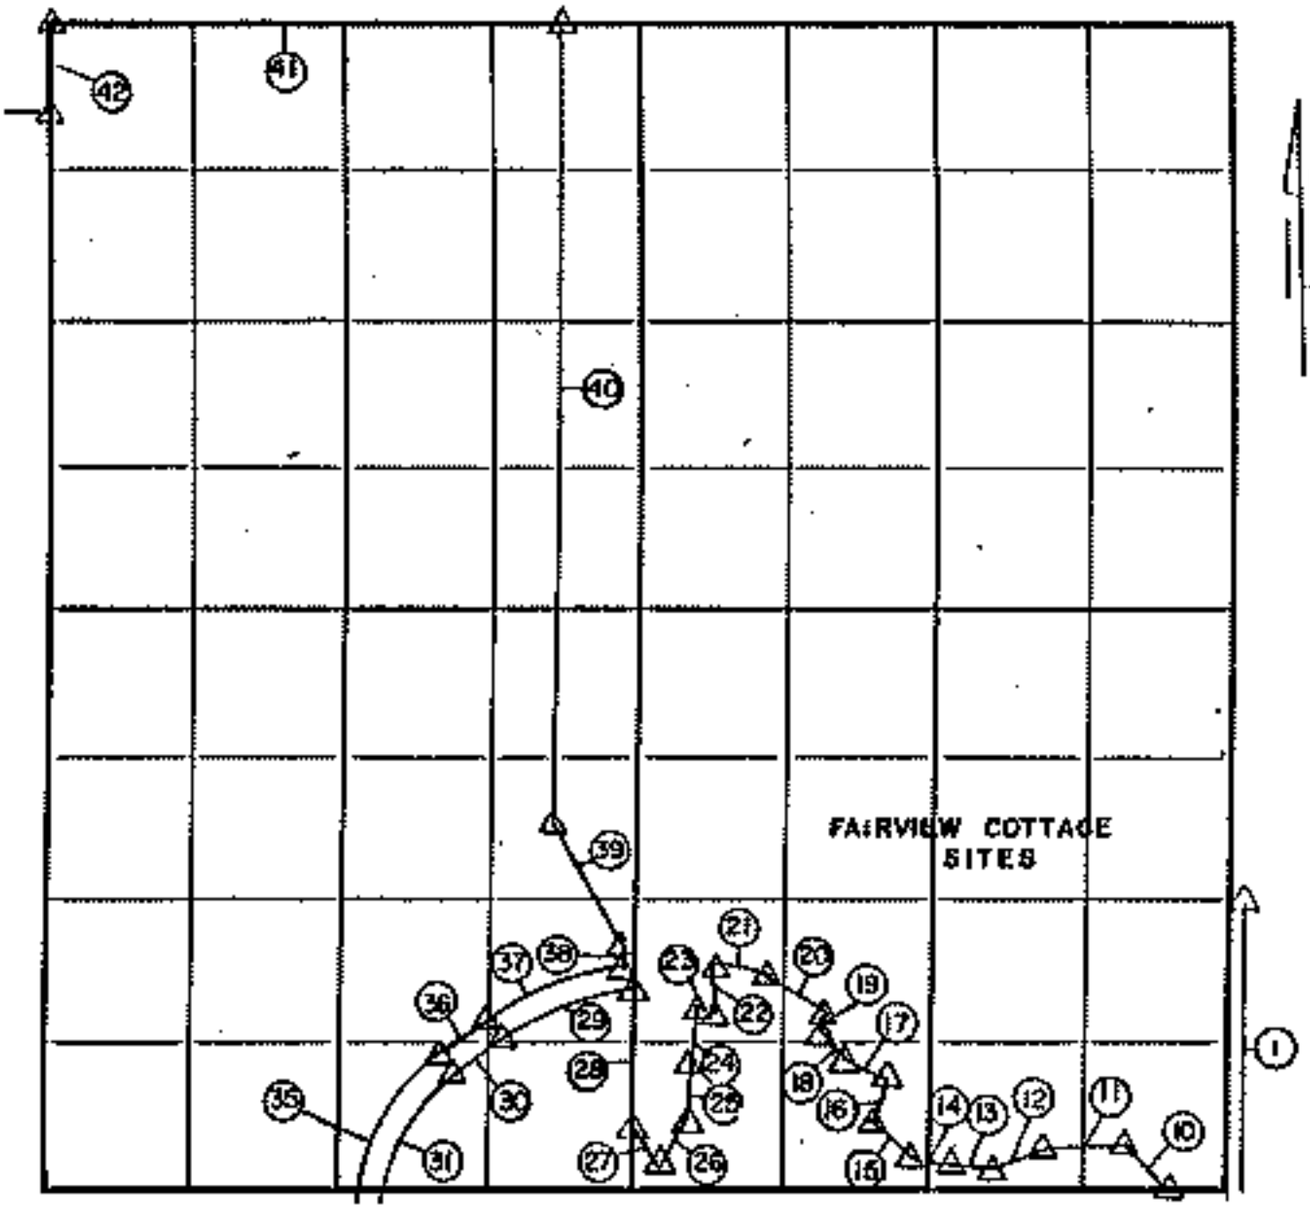

Course No.	Distance	Bearing	Course No.	Distance	Bearing
1	821.09'	S 0°31' W	22	111.90	S 04° 28' E
10	145.75'	N 40°49' W	23	55.30	N 63° 25' W
11	179.00'	S 85°43' W	24	140.50	S 31° 44' W
12	114.07'	S 69°28' W	25	120.50	S 05° 20' W
13	88.05'	N 85°41' W	26	112.28	S 24° 07' W
14	85.20'	N 83°35' W	27	103.70	N 44° 19' W
15	107.65'	N 46°36' W	28	348.30	N 00° 28' E
16	122.85'	N 25°10' E	29	352.80	R. 856.47
17	85.10'	N 68°06' W	30	135.72	S 56° 42' W
18	129.10'	N 35°52' W	31	506.84	R. 415.74
19	15.90'	N 18°15' E	35	567.79	R. 465.74
20	129.40'	N 67°49' W	36	135.72	N 56° 42' E
21	124.33'	R. 547.96	37	341.04	R. 906.47

CERTIFICATE OF SURVEY
I hereby certify that the above [illegible] Correct Representation of the Survey Made of Sec. [illegible]
BASIL E. SCOTT, JR.
REGISTERED
Basil E. Scott Jr.

Field Book No. 5-2008 Date 10-9-85

SCOTT & ASSOCIATES, INC.
Engineering & Surveying
For
U.S. ARMY ENGINEER DISTRICT, TULSA
CORPS OF ENGINEERS

△ MONUMENT
□ ORIGINAL CORNER
○ IRON PIN